

CARTRIDGE collector

ACC Drum Collection

Applications:

Process Dust
Welding fumes/smoke
Grinding dust
Soldering fumes/smoke

ACC-7DM

ACC-3DM

ACC-5DM




▲ Containment: fits 55-gallon
drum connection.

No Set Up Required
Comes Completely Assembled

Side View

Front View

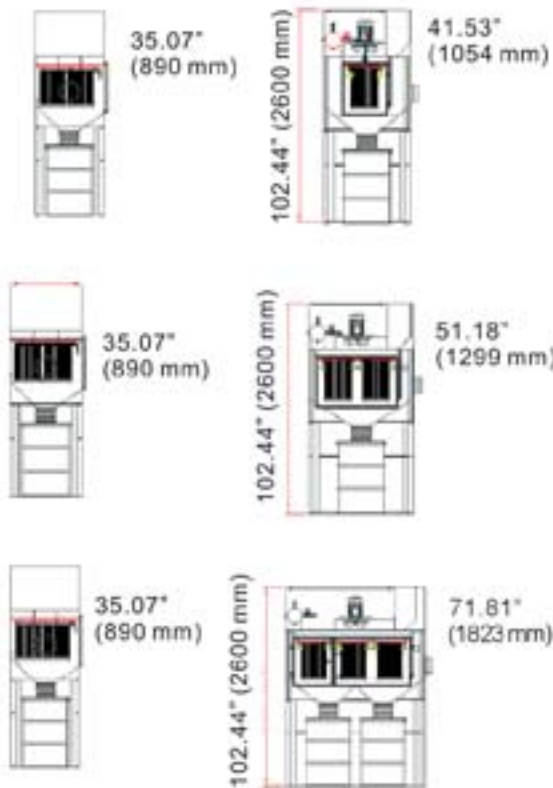

Standard Features

- All welded construction & powder coated
- On-line self-cleaning
- Optional manual cleaning
- Integrated control panel (start/stop, overload, transformer, timer board for pulse cycles)
- Fan: direct drive backward inclined
- Cartridges: spun bond polyester, Teflon coated
- Minihelic static pressure gauge
- Cartridge efficiencies @ 99% @ 1 microns
- Internal silencer material fan housing
- Maintenance door(s)
- 55 gallon drum configuration
- Built-in fork lift slots & lifting lugs

Optional Items

- HEPA after filter
- Outdoor Cover
- Fire suppressant system
- VOC filtration
- * optional 80/20 FR cartridge media available

TECHNICAL DATA

	HP	CFM	# of cartridges	Inlet size	Drum size
ACC-3DM-2	3	1450	2 pcs	Ø8"	55 gallon x 1 pc
ACC-3DM-4	3	1450	4 pcs	Ø8"	55 gallon x 1 pc
ACC-5DM-4	5	2000	4 pcs	Ø10"	55 gallon x 1 pc
ACC-5DM-6	5	2000	6 pcs	Ø10"	55 gallon x 2 pcs
ACC-7DM-6	7.5	2500	6 pcs	Ø12"	55 gallon x 2 pcs
ACC-10DM-9	10	3000	9 pcs	Ø12"	55 gallon x 2 pcs
ACC-10DM-12	10	3000	12 pcs	Ø12"	55 gallon x 2 pcs